

Interconnector-405 SLX TU5 ME17


| Engine                   |           |         |          | IC02A 23W BR           | MAIN     |         |           |       |
|--------------------------|-----------|---------|----------|------------------------|----------|---------|-----------|-------|
| Part                     | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |
| 8020                     | 2W YL     | 1       | 8079     | 1                      | 8079     | 5A      | 10W BK    | IC20B |
| 1020A                    | 2W BK     | 1       | 1070     | 2                      | 1070     | 3B      | 13W WI    | IC20A |
|                          |           | 1010    | 1086     | 3                      | 1086     | 7B      | 13W BR    | IC20G |
| 4025                     | 3W GY     | 3       | 401      | 4                      | 401      | 1B      | 13W WI    | IC20A |
| 4030                     | 2W BU     | 1       |          |                        |          |         |           |       |
| 4025                     | 3W GY     | 1       | 404      | 5                      | 404      | 4B      | 10W BK    | IC20B |
| 4025                     | 3W GY     | 2       | E404     | 6                      | M404     | 5B      | 10W BK    | IC20B |
| 1304                     | 16W BK    | 7       | 1232     | 7                      | 1232     | A15     | 56W BK    | 1320A |
| 1304                     | 16W BK    | 10      | 1233     | 8                      | 1233     | A42     | 56W BK    | 1320A |
| C1260                    | 2W BK     | 1       | 121      | 9                      | 121      | 7B      | 13W GY    | IC20E |
| 7113                     | 2W BU     | 1       | 7109     | 10                     | 7109     | A48     | 56W BK    | 1320A |
| 4110                     | 2W GY     | 2       | 410      | 11                     | 410      | 2B      | 13W WI    | IC20A |
| 2200                     | 2W GY     | 1       | C221     | 12                     | C221     | 2A      | 13W WI    | IC20A |
| 2200                     | 2W GY     | 2       | 220      | 13                     | 220      | 1A      | 13W WI    | IC20A |
| 1220                     | 2W GN     | 2       |          |                        |          |         |           |       |
| 1312                     | 4W GY     | 4       | 7303     | 14                     |          |         |           |       |
| 1320B                    | 56W BK    | B7      |          |                        |          |         |           |       |
| 1320B                    | 56W BK    | B16     | 7301     | 15                     |          |         |           |       |
| 1320B                    | 56W BK    | B34     | 1525     | 16                     | 1525     | 15      | 23W GY    | IC01  |
| 1320B                    | 56W BK    | B41     | 820      | 17                     | 820      | 7B      | 13W WI    | IC20A |
| C1262                    | 2W BK     | 2       | 1264     | 18                     | 1264A    | A55     | 56W BK    | 1320A |
|                          |           |         |          |                        | 1264B    | A56     | 56W BK    | 1320A |
| 1320B                    | 56W BK    | 32      | 1624     | 19                     | 1624     | 3B      | 10W BK    | IC20B |
|                          |           |         |          |                        | 1625     | 28      | 38W BK    | 7020  |
|                          |           |         |          | 20                     |          |         |           |       |
|                          |           |         |          | 21                     |          |         |           |       |
|                          |           |         |          | 22                     |          |         |           |       |
|                          |           |         |          | 23                     |          |         |           |       |
| HEAD LIGHT               |           |         |          | IC01 23W GY            | MAIN     |         |           |       |
| Part                     | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |
|                          |           |         |          | 1                      | 832      | 1B      | 10W BK    | IC20B |
|                          |           |         |          | 2                      | M832     | 2B      | 10W BK    | IC20B |
| 2615                     | 6W BK     | 1       | PC4      | 3                      | PC3      | 5A      | 13W GY    | IC20E |
| 2610                     | 6W BK     | 1       | PC3      | 4                      |          |         |           |       |
|                          |           |         |          | 5                      | 250      | 1B      | 13W GY    | IC20E |
| 2520A                    | 2W WI     | 1       | 250      | 6                      |          |         |           |       |
| 2520B                    | 2W WI     | 1       | 251      | 7                      |          |         |           |       |
| 2610                     | 6W BK     | 5       | V091     | 8                      |          |         |           |       |
| 2615                     | 6W BK     | 5       | V092     | 9                      | V090     | 1A      | 13W GY    | IC20E |
| 2320                     | 2W BR     | 1       | 2331     | 10                     | 2331     | 2A      | 13W GY    | IC20E |
|                          |           |         |          | 11                     |          |         |           |       |
| 2615                     | 6W BK     | 2       | PR4      | 12                     | PR1      | 6A      | 13W GY    | IC20E |
| 2610                     | 6W BK     | 2       | PR3      | 13                     |          |         |           |       |
|                          |           |         |          | 14                     |          |         |           |       |
| 1500B                    | 5W BK     | 5       |          | 15                     | 1510     | A22     | 56W BK    | 1320A |
| 1500C                    | 5W BK     | 4       | 1510     | 16                     |          |         |           |       |
| 1510B                    | 2W BK     | 1       |          | 17                     |          |         |           |       |
| 2325                     | 2W BR     | 1       | 2341     | 18                     | 2341     | 7A      | 13W GY    | IC20E |
| 2675                     | 2W WI     | 1       | PB5      | 19                     | PB5      | 4B      | 13W GY    | IC20E |
| 2670                     | 2W WI     | 1       | PB6      | 20                     |          |         |           |       |
|                          |           |         |          | 21                     |          |         |           |       |
| 1500B                    | 5W BK     | 1       | 8091     | 22                     | 1525     | 16      | 23W BR    | IC02A |
| 1500A                    | 5W BK     | 1       | 809      | 23                     | 1523     | A41     | 56W BK    | 1320A |
|                          |           |         |          | 24                     |          |         |           |       |
|                          |           |         |          | 25                     |          |         |           |       |
|                          |           |         |          | 26                     |          |         |           |       |
|                          |           |         |          | 27                     |          |         |           |       |
|                          |           |         |          | 28                     |          |         |           |       |
|                          |           |         |          | 29                     |          |         |           |       |
|                          |           |         |          | 30                     |          |         |           |       |
| 1500B                    | 5W BK     | 2       | K052     | 31                     | C031     | 4B      | 13W BR    | IC20G |
|                          |           |         |          | 32                     |          |         |           |       |
|                          |           |         |          | 33                     |          |         |           |       |
| Right Brake Wear Warning |           |         |          | IC03A 2W WI            | MAIN     |         |           |       |
| Part                     | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |
| 4431                     |           | 1       | 445      | 1                      | 446      | 1       | 2W WI     | IC03B |
|                          |           |         |          |                        |          | 2       | 2W BR     | 2345  |
|                          |           |         |          |                        |          | 2       | 2W BK     | 5100  |
|                          |           |         |          |                        |          | A53     | 56W BK    | 1320A |
|                          |           |         |          |                        |          | A54     | 56W BK    | 1320A |
| 4430                     |           | 2       | M44      | 2                      | M44A     | 2       | 2W BK     | 4410  |
|                          |           |         |          |                        |          | 2       | 2W BR     | 2340  |
|                          |           |         |          |                        |          | 1       | 6W BK     | 1203  |
|                          |           |         |          |                        |          | 2       | 2W WI     | IC03B |
|                          |           |         |          |                        |          |         |           | E006  |
| Left Brake Wear Warning  |           |         |          | IC03B 2W WI            | MAIN     |         |           |       |
| Part                     | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |
| 4430                     |           | 1       | 445      | 1                      | 445      | 5A      | 9W GY     | IC20F |
|                          |           |         |          |                        |          | 2       | 2W BR     | 2345  |
|                          |           |         |          |                        |          | 2       | 2W BK     | 5100  |
|                          |           |         |          |                        |          | A53     | 56W BK    | 1320A |
|                          |           |         |          |                        |          | A54     | 56W BK    | 1320A |
| 4431                     |           | 2       | M44      | 2                      | M44A     | 2       | 2W BK     | 4410  |
|                          |           |         |          |                        |          | 2       | 2W BR     | 2340  |
|                          |           |         |          |                        |          | 1       | 6W BK     | 1203  |
|                          |           |         |          |                        |          | 2       | 2W WI     | IC03A |
|                          |           |         |          |                        |          |         |           | M006  |

Interconnector-405 SLX TU5 ME17

| DASHBOARD |           |         |          | IC20A 13W WI           |          | MAIN    |           |       |  |
|-----------|-----------|---------|----------|------------------------|----------|---------|-----------|-------|--|
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |  |
| IC23B     | 13W BR    | 2A      | 220      | 1A                     | 220      | 13      | 23W BR    | IC02A |  |
| BF00H     | 13W RD    | 6B      | C221     | 2A                     | C221     | 12      | 23W BR    | IC02A |  |
| 0004A     | 16W BK    | 3       | 405      | 3A                     | 405      | A30     | 56W BK    | 1320A |  |
| BF00J     | 13W BU    | 1A      | CC1      | 5A                     | CC2      | A16     | 56W BK    | 1320A |  |
| SW00B     | 2W GY     | 2       |          |                        |          |         |           |       |  |
| BF00J     | 13W BU    | 4B      |          |                        |          |         |           |       |  |
| 7025      | 7W BK     | 5       | 7440     | 6A                     | 7440     | 16      | 38W BK    | 7020  |  |
| 7025      | 7W BK     | 3       | 7449     | 7A                     | 7449     | 4       | 38W BK    | 7020  |  |
| 0004B     | 20W BK    | 9       | 401      | 1B                     | 401      | 4       | 23W BR    | IC02A |  |
| 0004B     | 20W BK    | 15      | 410      | 2B                     | 410      | 11      | 23W BR    | IC02A |  |
| 0004B     | 20W BK    | 11      | 1070     | 3B                     | 1070     | 2       | 23W BR    | IC02A |  |
|           |           |         |          | 4B                     |          |         |           |       |  |
| 0004B     | 20W BK    | 2       | 426      | 5B                     | 426      | A28     | 56W BK    | 1320A |  |
|           |           |         |          | 6B                     |          |         |           |       |  |
| 0004A     | 16W BK    | 2       | 820      | 7B                     | 820      | 17      | 23W BR    | IC02A |  |
| DASHBOARD |           |         |          | IC20B 9W BK            |          | MAIN    |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |  |
|           |           |         |          | 1A                     |          |         |           |       |  |
| 8005      | 5W BK     | 2       | 1234     | 2A                     | 1234     | A31     | 56W BK    | 1320A |  |
| 8005      | 5W BK     | 3       | 807A     | 4A                     | 807A     | 2       | 4W BR     | 8007  |  |
| 8005      | 5W BK     | 5       | 8079     | 5A                     | 8079     | A18     | 56W BK    | 1320A |  |
|           |           |         |          | 1B                     | 832      | 1       | 23W BR    | IC02A |  |
|           |           |         |          | 2B                     | M832     | 2       | 23W GY    | IC01  |  |
| 0004B     | 20W BK    | 1       | 1624     | 3B                     | 1624     | 19      | 23W BR    | IC02A |  |
| 2305      | 12W WI    | 3       | 1623     | 4B                     | 404      | 5       | 23W BR    | IC02A |  |
|           |           |         |          | 5B                     | M404     | 6       | 23W BR    | IC02A |  |
| DASHBOARD |           |         |          | IC20C 2W BR            |          | MAIN    |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |  |
| BF00D     | 1W BK     | 1       | BB3      | 1                      | BB3      | 2       | 2W GY     | BB10B |  |
| BF00J     | 13W BU    | 5A      |          |                        |          |         |           |       |  |
| SW00      | 2W BK     | 1       |          |                        |          |         |           |       |  |
| 8208      | 5W WI     | 3       |          |                        |          |         |           |       |  |
| SW00C     | 2W BR     | 1       | BB5      | 2                      | BB5      | 1       | 2W GY     | BB10B |  |
| DASHBOARD |           |         |          | IC20D 2W BK            |          | MAIN    |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |  |
| BF00E     | 2W BK     | 1       | BB1      | 1                      | BB1      | 1       | 2W BK     | BB10A |  |
| BF00E     | 2W BK     | 2       | BB2      | 2                      | BB2      | 2       | 2W BK     | BB10A |  |
| DASHBOARD |           |         |          | IC20E 13W GY           |          | MAIN    |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |  |
| BF00C     | 13W GY    | 7B      | V090     | 1A                     | V090     | 6       | 23W GY    | IC01  |  |
| 2305      | 12W WI    | 11      | 2331     | 2A                     | 2331     | 7       | 23W GY    | IC01  |  |
| IC23A     | 13W BK    | A1      |          |                        |          |         |           |       |  |
| 0004B     | 20W BK    | 6       |          |                        | 2332     | 1       | 2W BR     | 2340  |  |
| 2100      | 4W WI     | 4       | 218      | 3A                     | 218      | A35     | 56W BK    | 1320A |  |
| 0002      | 9W BK     | 5B      | PC1      | 5A                     | PC3      | 3       | 23W GY    | IC01  |  |
| 0004A     | 16W BK    | 14      | PC5      | 6A                     | PR1      | 9       | 23W GY    | IC01  |  |
| 0002      | 9W BK     | 3B      | PR1      | 7A                     | 2342     | 1       | 2W BR     | 2345  |  |
| 2305      | 12W WI    | 10      | 2341     | 7A                     | 2341     | 12      | 23W GY    | IC01  |  |
| IC23C     | 13W GY    | 1A      |          |                        |          |         |           |       |  |
| 0004B     | 20W BK    | 10      |          |                        | 250      | 5       | 23W GY    | IC01  |  |
| 2505      | 5W GN     | 5       | 253      | 1B                     | 250      | 5       | 23W GY    | IC01  |  |
| C001      | 16W BK    | 7       | 141      | 2B                     | 141      | A39     | 56W BK    | 1320A |  |
|           |           |         |          | 3B                     |          |         |           |       |  |
| 0004A     | 16W BK    | 12      | PB6      | 4B                     | PB5      | 13      | 23W GY    | IC01  |  |
| 2665      | 5W GN     | 5       |          |                        |          |         |           |       |  |
|           |           |         |          | 5B                     |          |         |           |       |  |
| 2100      | 4W WI     | 2       | 215      | 6B                     | 215      | A47     | 56W BK    | 1320A |  |
| IC23C     | 13W GY    | 2B      | 121      | 7B                     | 121      | 9       | 23W BR    | IC02A |  |
| DASHBOARD |           |         |          | IC20F 9W GY            |          | MAIN    |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |  |
| BF00G     | 9W YL     | 5A      | A240     | 1A                     | A240     | 3       | 5W WI     | 5015  |  |
| 0005      | 11W GY    | 5B      | 500      | 2A                     | 500      | 4       | 5W WI     | 5015  |  |
| 5010      | 9W BU     | 5       | 503      | 4A                     | 503      | 5       | 5W WI     | 5015  |  |
| 0004B     | 20W BK    | 20      | 444      | 5A                     | 445      | 1       | 2W WI     | IC03B |  |
| 0004B     | 20W BK    | 16      | 480      | 1B                     | 446      | 1       | 2W WI     | IC03A |  |
| 0005      | 11W GY    | 6B      | 501      | 2B                     | 480      | A40     | 56W BK    | 1320A |  |
| 5010      | 9W BU     | 6       | 510      | 3B                     | 501      | 1       | 5W WI     | 5015  |  |
| IC23B     | 13W BR    | 3B      | 440      | 4B                     | 4410     | 1       | 2W BK     | 4410  |  |
| 0004B     | 20W BK    | 14      |          |                        |          |         |           |       |  |
| 7025      | 7W BK     | 7       | 7443     |                        |          |         |           |       |  |
| 7045      | 2W BR     | 2       | 7045     | 5B                     | 7045     | A36     | 56W BK    | 1320A |  |
| DASHBOARD |           |         |          | IC20G 13W BR           |          | MAIN    |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num | Pin Num | Connector | Part  |  |
|           |           |         |          | 1A                     |          |         |           |       |  |
|           |           |         |          | 2A                     |          |         |           |       |  |
|           |           |         |          | 3A                     |          |         |           |       |  |
|           |           |         |          | 5A                     |          |         |           |       |  |
| C001      | 16W BK    | 6       | 9020     | 6A                     | 9020     | A32     | 56W BK    | 1320A |  |
| C001      | 16W BK    | 14      | 9019     | 7A                     | 9019     | A44     | 56W BK    | 1320A |  |
| IC26A     | 11W WI    | 3B      | 8054     | 1B                     | 8054     | A34     | 56W BK    | 1320A |  |
| BF00H     | 13W RD    | 6A      | C020     | 2B                     | C020     | 4       | 4W BR     | 8007  |  |
|           |           |         |          | 3B                     |          |         |           |       |  |
| BF00H     | 13W RD    | 3A      | C031     | 4B                     | C031     | 22      | 23W GY    | IC01  |  |
| 8208      | 5W WI     | 2       | 8221     | 5B                     | 8221     | A27     | 56W BK    | 1320A |  |
|           |           |         |          | 6B                     |          |         |           |       |  |
| SW00      | 2W BK     | 2       | 1086     | 7B                     | 1086     | 3       | 23W BR    | IC02A |  |

Interconnector-405 SLX TU5 ME17

| DASHBOARD |           |         |          | IC20K 9W OR            | MAIN      |         |           |       |  |
|-----------|-----------|---------|----------|------------------------|-----------|---------|-----------|-------|--|
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num  | Pin Num | Connector | Part  |  |
|           |           |         |          | 1A                     |           |         |           |       |  |
| IC23B     | 13W BR    | 4B      | 7215     | 2A                     | 7215      | 30      | 38W BK    | 7020  |  |
| 2100      | 4W WI     | 2       |          | 4A                     | 779       | 17      | 38W BK    | 7020  |  |
| C001      | 16W BK    | 12      |          | 5A                     |           |         |           |       |  |
| IC23A     | 13W BK    | B4      | 702      | 1B                     | 702       | 20      | 38W BK    | 7020  |  |
| IC23A     | 13W BK    | B5      | 7021     | 2B                     | 7021      | 33      | 38W BK    | 7020  |  |
| IC23B     | 13W BR    | 5B      | 703      | 3B                     | 703       | 31      | 38W BK    | 7020  |  |
| IC23B     | 13W BR    | 6B      | 7031     | 4B                     | 7031      | 19      | 38W BK    | 7020  |  |
| BF00H     | 13W RD    | 3B      | C037     | 5B                     | C037      | 32      | 38W BK    | 7020  |  |
| ROOF LAMP |           |         |          | IC21 13W BK            | DASHBOARD |         |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num  | Pin Num | Connector | Part  |  |
|           |           |         |          | 1A                     |           |         |           |       |  |
| 3010      | 3W BR     | 2       | B153     | 2A                     | B153      | 7B      | 13W GN    | BF00I |  |
| 3010      | 3W BR     | 1       | 300      | 3A                     | 303       | 5       | 5W WI     | 4720  |  |
|           |           |         |          |                        |           | 12      | 20W BK    | 0004B |  |
|           |           |         |          |                        |           | 7B      | 13W BK    | IC22A |  |
|           |           |         |          |                        |           | 4B      | 13W BK    | IC21  |  |
|           |           |         |          |                        |           | 5B      | 13W GY    | IC23C |  |
|           |           |         |          |                        |           | B2      | 13W BK    | IC23A |  |
|           |           |         |          |                        |           | 7B      | 13W BK    | IC24A |  |
| 3065      | 2W BR     | 2       | MP       | 5A                     | M301      | 4       | 5W WI     | 8208  |  |
|           |           |         |          |                        |           | 1       | 5W GY     | 6233  |  |
|           |           |         |          |                        |           | 2       | 5W GN     | 2665  |  |
|           |           |         |          |                        |           | 2       | 5W YL     | 8048  |  |
|           |           |         |          |                        |           | 2       | 5W BK     | 6020  |  |
|           |           |         |          |                        |           | 2       | 5W OR     | 8116  |  |
|           |           |         |          |                        |           | E020A   |           |       |  |
|           |           |         |          |                        |           | 4       | 16W BK    | C001  |  |
|           |           |         |          |                        |           | 5       | 16W BK    | C001  |  |
|           |           |         |          |                        |           | 2       | 5W GN     | 2505  |  |
| 5         | 12W WI    | 2305    |          |                        |           |         |           |       |  |
| 8         | 18W BK    | 8410C   |          |                        |           |         |           |       |  |
| 3         | 20W BK    | 0004B   |          |                        |           |         |           |       |  |
|           |           |         |          | 6A                     |           |         |           |       |  |
|           |           |         |          | 7A                     |           |         |           |       |  |
|           |           |         |          | 1B                     | 627       | 6       | 9W BR     | 6235  |  |
|           |           |         |          | 2B                     | 628       | 9       | 9W BR     | 6235  |  |
| 3065      | 2W BR     | 1       | A304     | 3B                     | A304      | 4B      | 13W GN    | BF00I |  |
| 3092      |           |         |          | 4B                     | 3092      | 3A      | 13W BK    | IC21  |  |
|           |           |         |          |                        |           | 7B      | 13W BK    | IC24A |  |
|           |           |         |          |                        |           | B2      | 13W BK    | IC23A |  |
|           |           |         |          |                        |           | 12      | 20W BK    | 0004B |  |
|           |           |         |          |                        |           | 5       | 5W WI     | 4720  |  |
|           |           |         |          |                        |           | 5B      | 13W GY    | IC23C |  |
|           |           |         |          |                        |           | 7B      | 13W BK    | IC22A |  |
|           |           |         |          | 5B                     |           |         |           |       |  |
|           |           |         |          | 6B                     |           |         |           |       |  |
|           |           |         |          | 7B                     |           |         |           |       |  |
| REAR      |           |         |          | IC32 9W BR             | RLH DOOR  |         |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num  | Pin Num | Connector | Part  |  |
|           |           |         |          | 1A                     |           |         |           |       |  |
|           |           |         |          | 2A                     |           |         |           |       |  |
| IC23B     | 13W BR    | 7A      | 6203     | 4A                     | 6203      | 1       | 2W BR     | 6255  |  |
| IC33      | 9W BR     | 4A      |          | 5A                     | 6213      | 2       | 2W BR     | 6255  |  |
| 6265      | 2W WI     | 2       |          |                        |           |         |           |       |  |
| IC23B     | 13W BR    | 1B      | 6213     | 5A                     | 6213      | 2       | 2W BR     | 6255  |  |
| IC33      | 9W BR     | 5A      |          |                        |           |         |           |       |  |
| 6265      | 2W WI     | 1       |          |                        |           |         |           |       |  |
|           |           |         |          | 1B                     |           |         |           |       |  |
|           |           |         |          | 2B                     |           |         |           |       |  |
|           |           |         |          | 3B                     |           |         |           |       |  |
| E026G     |           |         |          | 4B                     | M8        | 2       | 2W BK     | 8612  |  |
| 2630      | 6W BR     | 1       |          |                        |           |         |           |       |  |
| 2110      | 2W WI     | 1       |          |                        |           |         |           |       |  |
| 3100      | 2W BR     | 2       |          |                        |           |         |           |       |  |
| 3020      | 3W BR     | 3       |          |                        |           |         |           |       |  |
| IC23A     | 13W BK    | 2B      | 8613     | 5B                     | 8613      | 1       | 2W BK     | 8612  |  |
| REAR      |           |         |          | IC33 9W BR             | RRH DOOR  |         |           |       |  |
| Part      | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num  | Pin Num | Connector | Part  |  |
|           |           |         |          | 1A                     |           |         |           |       |  |
|           |           |         |          | 2A                     |           |         |           |       |  |
| IC23B     | 13W BR    | 7A      | 6204     | 4A                     | 6203      | 1       | 2W BR     | 6250  |  |
| IC32      | 9W BR     | 4A      |          | 5A                     | 6213      | 2       | 2W BR     | 6250  |  |
| 6265      | 2W WI     | 2       |          |                        |           |         |           |       |  |
| IC23B     | 13W BR    | 1B      | 6214     | 5A                     | 6213      | 2       | 2W BR     | 6250  |  |
| IC32      | 9W BR     | 5A      |          |                        |           |         |           |       |  |
| 6265      | 2W WI     | 1       |          |                        |           |         |           |       |  |
|           |           |         |          | 1B                     |           |         |           |       |  |
|           |           |         |          | 2B                     |           |         |           |       |  |
|           |           |         |          | 3B                     |           |         |           |       |  |
| E026D     |           |         |          | 4B                     | M8        | 2       | 2W BK     | 8613  |  |
| 2635      | 6W BR     | 6       |          |                        |           |         |           |       |  |
| 6260      | 2W BR     | 1       |          |                        |           |         |           |       |  |
| 4400      | 2W BR     | 2       |          |                        |           |         |           |       |  |
| 4310      | 6W BK     | 4       |          |                        |           |         |           |       |  |
| 4730      | 2W WI     | 1       |          |                        |           |         |           |       |  |
| IC23A     | 13W BK    | 2B      | 8614     | 5B                     | 8613      | 1       | 2W BK     | 8613  |  |

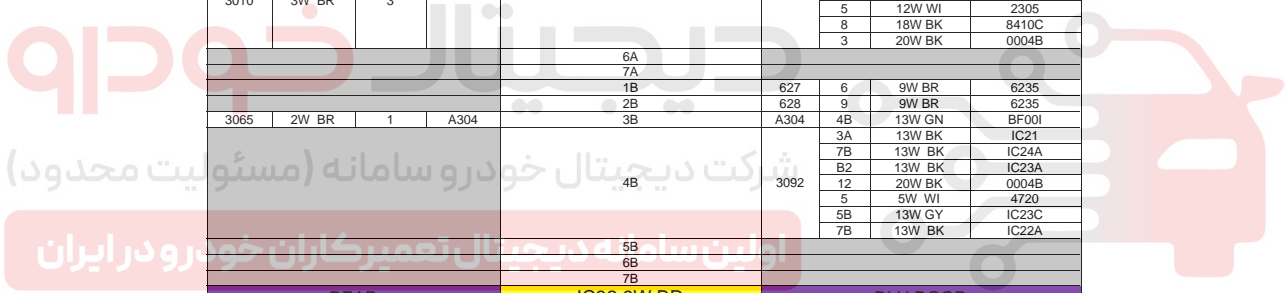



Interconnector-405 SLX TU5 ME17

| FLH DOOR |           |         |          | IC22A 13W BK           | DASHBOARD |         |           |        |       |
|----------|-----------|---------|----------|------------------------|-----------|---------|-----------|--------|-------|
| Part     | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num  | Pin Num | Connector | Part   |       |
| 8420     | 2W YL     | 2       | 841      | 1A                     | 841       | 5       | 8W WI     | 8410B  |       |
| 8420     | 2W YL     | 1       | 842      | 2A                     | 842       | 6       | 8W WI     | 8410B  |       |
| 6240     | 2W BR     | 1       | 6201     | 3A                     | 6201      | 3       | 9W BR     | 6235   |       |
| 6240     | 2W BR     | 2       | 6211     | 5A                     | 6211      | 7A      | 13W BR    | IC23B  |       |
| 6410     | 5W WI     | 4       | 813      | 6A                     | 813       | 3A      | 13W BK    | IC24A  |       |
| 6200     | 3W WI     | 2       | 6231     | 7A                     | 6231      | 4       | 9W BR     | 6235   |       |
| 6200     | 3W WI     | 1       | 6251     | 1B                     | 6251      | 1B      | 13W BK    | IC24A  |       |
| 4700     | 2W GY     | 2       | MPC      | 2B                     | MPC       | 6A      | 13W BK    | IC24A  |       |
| 6030     | 9W RD     | 2A      |          |                        |           | 5       | 5W OR     | 8116   |       |
| 6200     | 3W WI     | 3       |          |                        |           | 12      | 18W BK    | 8410C  |       |
| 6410     | 5W WI     | 5       |          |                        |           | A7      | 13W BK    | IC23A  |       |
| 6000     | 9W BK     | 4A      |          |                        |           | 7A      | 13W BK    | IC24A  |       |
| 6405     | 8W BK     | 4A      |          |                        |           | 7       | 9W BR     | 6235   |       |
| 6000     | 9W BK     | 4B      |          |                        |           | 606     | 4         | 9W BU  | 5010  |
| 6000     | 9W BK     | 5B      |          |                        |           | 607     | 8         | 16W BK | 0004A |
| 6000     | 9W BK     | 3B      |          |                        |           | 6002    | 9         | 16W BK | 0004A |
| 6030     | 9W RD     | 5A      |          |                        |           | 6005    | 16        | 16W BK | 0004A |
| 6405     | 8W BK     | 2A      | A301     | 4                      | 7W BK     | 7025    |           |        |       |
| 6030     | 9W RD     | 3B      | A302     | 3                      | 3W BK     | 8100    |           |        |       |
| 4700     | 2W GY     | 1       | 8611     | 5B                     | 9W BR     | 6235    |           |        |       |
|          |           |         |          | 10                     | 18W BK    | 8410C   |           |        |       |
|          |           |         |          | 5A                     | 11W WI    | IC26A   |           |        |       |
|          |           |         |          | 2B                     | 13W BK    | IC24A   |           |        |       |
|          |           |         |          | E020                   |           |         |           |        |       |
|          |           |         |          | 8                      | 50W GN    | 6570    |           |        |       |
|          |           |         |          | 4B                     | 13W GY    | IC23C   |           |        |       |
|          |           |         |          | 3B                     | 13W BK    | IC24A   |           |        |       |
|          |           |         |          | 4B                     | 13W BK    | IC24A   |           |        |       |
|          |           |         |          | 5B                     | 13W BK    | IC24A   |           |        |       |
|          |           |         |          | 5                      | 5W BK     | 6020    |           |        |       |
|          |           |         |          | 4B                     | 13W BR    | BF00B   |           |        |       |
|          |           |         |          | 5B                     | 13W GY    | IC23C   |           |        |       |
|          |           |         |          | 7B                     | 13W BK    | IC24A   |           |        |       |
|          |           |         |          | B2                     | 13W BK    | IC23A   |           |        |       |
|          |           |         |          | 3A                     | 13W BK    | IC21    |           |        |       |
|          |           |         |          | 12                     | 20W BK    | 0004B   |           |        |       |
|          |           |         |          | 5                      | 5W WI     | 4720    |           |        |       |
|          |           |         |          | 4B                     | 13W BK    | IC21    |           |        |       |
| FLH DOOR |           |         |          | IC22B 13W GY           | DASHBOARD |         |           |        |       |
| Part     | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num  | Pin Num | Connector | Part   |       |
| 6405     | 8W BK     | 3B      | 6411     | 1A                     | 6411      | 1A      | 13W GY    | IC24B  |       |
| IC22B    | 13W GY    | 6B      | 641      | 2A                     | 641       | 2A      | 13W GY    | IC24B  |       |
| 6405     | 8W BK     | 1B      | 6412     | 3A                     | 6412      | 3A      | 13W GY    | IC24B  |       |
|          |           |         |          | 5A                     |           |         |           |        |       |
|          |           |         |          | 6A                     |           |         |           |        |       |
|          |           |         |          | 7A                     |           |         |           |        |       |
|          |           |         |          | 1B                     |           |         |           |        |       |
| 6405     | 8W BK     | 1A      | V190     | 2B                     | V190      | 5B      | 13W BU    | BF00J  |       |
|          |           |         |          |                        |           | 2B      | 11W WI    | IC26A  |       |
|          |           |         |          |                        |           | 2       | 5W WI     | 4720   |       |
|          |           |         |          |                        |           | 6       | 8W BK     | 8410A  |       |
|          |           |         |          |                        |           | 6       | 18W BK    | 8410C  |       |
|          |           |         |          |                        |           | 1       | 1W BK     | 3053   |       |
|          |           |         |          |                        |           | 10      | 16W BK    | 0004A  |       |
|          |           |         |          | 3B                     |           |         |           |        |       |
|          |           |         |          | 4B                     |           |         |           |        |       |
|          |           |         |          | 5B                     |           |         |           |        |       |
| 6405     | 8W BK     | 3A      | 640      | 6B                     | 640       | 7B      | 13W GY    | IC22B  |       |
| IC22B    | 13W GY    | 2A      | 641      | 7B                     | 640       | 6B      | 13W GY    | IC22B  |       |
| 6410     | 5W WI     | 2       | 6400     | 7B                     | 640       | 6B      | 13W GY    | IC22B  |       |
| FRH DOOR |           |         |          | IC24A 13W BK           | DASHBOARD |         |           |        |       |
| Part     | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num  | Pin Num | Connector | Part   |       |
| 8425     | 2W YL     | 2       | 843      | 1A                     | 843       | 3       | 8W WI     | 8410B  |       |
| 8425     | 2W YL     | 1       | 844      | 2A                     | 844       | 4       | 8W WI     | 8410B  |       |
| 6245     | 2W BR     | 1       | 6202     | 3A                     | 6202      | 3       | 9W BR     | 6235   |       |
| 6245     | 2W BR     | 2       | 6212     | 5A                     | 6212      | 3A      | 13W BK    | IC22A  |       |
| 6415     | 5W WI     | 4       | 814      | 6A                     | 814       | 7A      | 13W BR    | IC23B  |       |
| 6205     | 3W WI     | 2       | 6232     | 7A                     | 6231      | 4       | 9W BR     | 6235   |       |
| 6205     | 3W WI     | 1       | 6252     | 1B                     | 6232      | 5A      | 13W BK    | IC22A  |       |
| 6205     | 3W WI     | 3       | M620     | 2B                     | M814      | 1B      | 13W BR    | IC23B  |       |
| 6415     | 5W WI     | 5       | M814     |                        |           | 7A      | 13W BK    | IC23A  |       |
| 6005     | 5W WI     | 1B      | 606      |                        |           | 12      | 18W BK    | 8410C  |       |
| 6005     | 5W WI     | 2A      | 607      |                        |           | 5       | 5W OR     | 8116   |       |
| 6005     | 5W WI     | 1A      | 6003     |                        |           | 6A      | 13W BK    | IC22A  |       |
|          |           |         |          |                        |           | 7A      | 13W BK    | IC22A  |       |
|          |           |         |          |                        |           | 5       | 9W BR     | 6235   |       |
|          |           |         |          |                        |           | 8       | 9W BR     | 6235   |       |
|          |           |         |          |                        |           | E020    |           |        |       |
|          |           |         |          |                        |           | 4       | 9W BU     | 5010   |       |
|          |           |         |          | 8                      | 16W BK    | 0004A   |           |        |       |
|          |           |         |          | 9                      | 16W BK    | 0004A   |           |        |       |
|          |           |         |          | 10                     | 18W BK    | 8410C   |           |        |       |
|          |           |         |          | 16                     | 16W BK    | 0004A   |           |        |       |
|          |           |         |          | 2B                     | 13W BK    | IC22A   |           |        |       |
|          |           |         |          | 2                      | 9W BR     | 6235    |           |        |       |
|          |           |         |          | 4B                     | 13W GY    | IC23C   |           |        |       |
|          |           |         |          | 3                      | 3W BK     | 8100    |           |        |       |
|          |           |         |          | 6                      | 50W GN    | 6570    |           |        |       |
|          |           |         |          | 4                      | 7W BK     | 7025    |           |        |       |
|          |           |         |          | 5A                     | 11W WI    | IC26A   |           |        |       |
|          |           |         |          | 3B                     | 13W BK    | IC22A   |           |        |       |
|          |           |         |          | 4B                     | 13W BK    | IC22A   |           |        |       |
|          |           |         |          | 5B                     | 13W BK    | IC22A   |           |        |       |
|          |           |         |          | 5                      | 5W BK     | 6020    |           |        |       |

Interconnector-405 SLX TU5 ME17

|                      |           |         |          | 6B                     |                  |         |           |       |
|----------------------|-----------|---------|----------|------------------------|------------------|---------|-----------|-------|
| 4701                 | 2W GY     | 1       | 8612     | 7B                     | 8612             | 4B      | 13W BK    | IC21  |
|                      |           |         |          |                        |                  | 3A      | 13W BK    | IC21  |
|                      |           |         |          |                        |                  | 5B      | 13W GY    | IC23C |
|                      |           |         |          |                        |                  | B2      | 13W BK    | IC23A |
|                      |           |         |          |                        |                  | 12      | 20W BK    | 0004B |
|                      |           |         |          |                        |                  | 5       | 5W WI     | 4720  |
|                      |           |         |          |                        |                  | 7B      | 13W BK    | IC22A |
| <b>FRH DOOR</b>      |           |         |          | <b>IC24B 13W GY</b>    | <b>DASHBOARD</b> |         |           |       |
| Part                 | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num         | Pin Num | Connector | Part  |
| 6415                 | 5W WI     | 1       | 6411     | 1A                     | 6411             | 1A      | 13W GY    | IC22B |
| 6415                 | 5W WI     | 2       | 641      | 2A                     | 641              | 2A      | 13W GY    | IC22B |
| 6415                 | 5W WI     | 3       | 6412     | 3A                     | 6412             | 3A      | 13W GY    | IC22B |
|                      |           |         |          | 5A                     |                  |         |           |       |
|                      |           |         |          | 6A                     |                  |         |           |       |
|                      |           |         |          | 7A                     |                  |         |           |       |
|                      |           |         |          | 1B                     |                  |         |           |       |
|                      |           |         |          | 2B                     |                  |         |           |       |
|                      |           |         |          | 3B                     |                  |         |           |       |
|                      |           |         |          | 4B                     |                  |         |           |       |
|                      |           |         |          | 5B                     |                  |         |           |       |
|                      |           |         |          | 6B                     |                  |         |           |       |
|                      |           |         |          | 7B                     |                  |         |           |       |
| <b>AIR CONDITION</b> |           |         |          | <b>IC26A 11W WI</b>    | <b>DASHBOARD</b> |         |           |       |
| Part                 | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num         | Pin Num | Connector | Part  |
| 8050                 | 2W        | 1       |          | 1A                     | 803              | 3       | 5W YL     | 8048  |
| 8015                 | 2W        | 1       |          |                        |                  |         |           |       |
| 8070                 | 5W        | 2       |          | 2A                     |                  |         |           |       |
| 8025                 | 10W       | 8       |          |                        |                  |         |           |       |
| 8047                 | 6W        | 4       |          | 4A                     | M805             |         |           |       |
| 8006                 | 2W BK     | 1       |          |                        |                  |         |           |       |
| 8035                 | 7W        | 7       |          | 5A                     | M80              |         |           |       |
| 8025                 | 10W       | 5       |          |                        |                  |         |           |       |
| 8025                 | 10W       | 10      |          | 6A                     | V19T             |         |           |       |
| 8035                 | 7W        | 1       |          | 1B                     | K232             | 1A      | 13W GY    | BF00C |
| 8015                 | 5W        | 5       |          |                        |                  |         |           |       |
| 8025                 | 10W       | 3       |          | 2B                     | V19T             | 6A      | 11W WI    | IC26A |
|                      |           |         |          |                        |                  | 5B      | 13W BU    | BF00J |
|                      |           |         |          |                        |                  | 2B      | 13W GY    | IC22B |
|                      |           |         |          |                        |                  | 2       | 5W WI     | 4720  |
|                      |           |         |          |                        |                  | 6       | 8W BK     | 8410A |
|                      |           |         |          |                        |                  | 6       | 18W BK    | 8410C |
|                      |           |         |          |                        |                  | 1       | 1W BK     | 3053  |
|                      |           |         |          |                        |                  | 10      | 16W BK    | 0004A |
| 8015                 | 5W        | 3       |          | 3B                     | 8054             | 1B      | 13W BR    | IC20G |
| 8015                 | 5W        | 2       |          | 4B                     |                  |         |           |       |
| 8025                 | 10W       | 2       |          |                        |                  |         |           |       |
|                      |           |         |          | 5B                     |                  |         |           |       |
|                      |           |         |          | 6B                     |                  |         |           |       |
| <b>Injector</b>      |           |         |          | <b>IC023 6W BK</b>     | <b>Engine</b>    |         |           |       |
| Part                 | Connector | Pin Num | Wire Num | Interconnector Pin Num | Wire Num         | Pin Num | Connector | Part  |
| 1331                 | 2W BK     | 1       | 1321     | 1                      | 1321             | B44     | 56W BK    | 1320B |
| 1332                 | 2W BK     | 2       | 1322     | 2                      | 1322             | B42     | 56W BK    | 1320B |
| 1331                 | 2W BK     | 2       |          |                        |                  |         |           |       |
| 1332                 | 2W BK     | 2       | 1320     | 3                      | 1200             | 4       | 16W BK    | 1304  |
| 1333                 | 2W BK     | 2       |          |                        |                  |         |           |       |
| 1334                 | 2W BK     | 2       |          |                        |                  |         |           |       |
|                      |           |         |          | 4                      |                  |         |           |       |
| 1333                 | 2W BK     | 1       | 1323     | 5                      | 1323             | B43     | 56W BK    | 1320B |
| 1334                 | 2W BK     | 1       | 1324     | 6                      | 1324             | B45     | 56W BK    | 1320B |

